

# PRESS RELEASE

July 2011



# New wall-mounted EPOS till system: AURES unveils W-Touch by POSLIGNE®

Runcorn - Lisses, July 6<sup>th</sup> - 2011; the **AURES** Group, manufacturer of the **POSLIGNE®** range of till management and EPOS systems, has unveiled the **W-Touch**, an "all-in-one" touch screen equipment featuring a slimline, fanless and splash-proof design, developed predominantly for **wall-mounted till applications**.

**W-Touch by POSLIGNE®** is an integrated 15-inch touch screen system: just 480 mm thick, this integrated EPOS has been designed to be wall mounted, freeing up space at the cash desk.

- Equipped with an *INTEL Atom Pineview dual-core D525* processor, the fanless terminal offers excellent resistance to dust and crumbs; it is splash proof (IP 54 standards) and also boasts *optimised power consumption characteristics*.
- Designed for wall-mounted applications, **W-Touch** is perfect for all types of sales and service outlets where space is at a minimum and till staff stand whilst they work.
- It is perfect for takeaway sales, catering and kitchen environments, bars, fast food outlets and mini-markets, as well as food and non-food self-serve stores and points of service.


**W-Touch** can easily be adapted to both *checkout and self-checkout set-ups*, and is available in 2 colours: *graphite black and pure white*.





### W-Touch: key features

- Wall-mounted, integrated touch screen system with VESA fixings
- Slimline design
- INTEL Pineview Dual Core D525 processor
- Fanless system, ideal for harsh environments
- Optimised power consumption
- Splash-proof, IP 54 standards (front face)
- Hard drive on removable rack
- Optional SSD flash drive
- 2 colours: graphite black and pure white

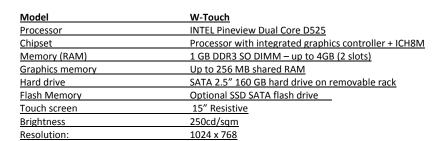

POSLIGNE®

#### **Inputs / Outputs**

Serial/COM	4 ports (2 self-powered)
USB 2.0	4 USB 2.0
Parallel port	1 Sub-D 25 pin connector
LAN 10/100/1000	1 RJ45
Cash drawer output	1 RJ11 (12V/24V)
Mike input	<u>1</u>
Audio output	<u>1</u>
Additional video output	<u>1</u>
Mini PCIe slot	<u>1</u>

## **Other features**

Power Supply	External, 90W, 19V, 4.7A
Operating temperature	5°C to 35°C (41° F to 95° F)
Storage temperature	-20° to 55° C (-4° F to 140° F)
IP 54 standard	Splash-proof front face
Humidity rating (in operation)	20% to 80% (RH without condensation)
Humidity rating (in storage)	20% to 80% (RH without condensation)
Dimensions (W v H v D)	362 v 280 v 48 mm (excluding wall bracket)

Standard VESA 100 x 100 mm may be used on a wall-mounted bracket or pole.

Weight 7kg

 Compatible Operating Systems
 Vista, Windows XP Pro, WIN 2000/NT 4.0, POS Ready, Windows 7, Linux

 Options
 SSD flash drive

 Colours
 Graphite black and pure white



#### About the AURES Group

Founded in 1989 and listed on Euronext Paris since 1999, the Group manufactures point of sale terminals and EPOS systems, as well as related peripherals, which it markets under the POSLIGNE® brand.

Acclaimed for its excellent reliability, this PC-based, open-system hardware is designed to provide management and till functions in specialist food and non-food stores, retail outlets, superstores, the catering and hospitality industry and all other points of sale and service.

Offering EPOS hardware featuring innovative designs and a wide range of fully interchangeable colours, the AURES Group is positioned as the most creative leader in its field.

Distribution of POSLIGNE<sup>®</sup> systems is based out of AURES' headquarters in France, the Group's three subsidiaries in the United Kingdom, Germany and the USA, and a distributor network present in over fifty countries.

For further information, please contact:

#### Yannick-Florence WAELLY

+33 (0)1 69 11 16 65 (direct line)

yannick.waelly@aures.com

www.aures.com





W-Touch wall-mounted till system – photos: AURES 2011